


LOW PROFILE STATIC LIFT TABLE

WITH **1000KG CAPACITY**

model


PSL80F & PSL82U

- Model PSL80F , Low Profile Static Lift Table (Mains Operated)
- Capacity 1000kg
- The PSL80F achieves a low closed height and usually eliminates the need for a pit
- They lift up to 860mm and also help alleviate bending and twisting often found in industrial environments
- Tables are controlled by a 24V0 'satellite' hydraulic power pack consisting of up, down and emergency stop buttons
- Tables are powered by AC380v/50Hz/3 phase mains
- Ramp supplied for ease of loading and unloading the pallets.
- Pressure relief valve fitted to protect the hydraulic system
- Oil less bushing on axle pivots
- Emergency check valve to ensure slow controlled descent in the event of a hydraulic line failure
- Removable lifting eyes to facilitate easy handling and installation
- Tables have fully interlocked descent arrestors should there be an obstruction
- These tables are manufactured to EN1570:1999 and are IP54 protected
- Available in both full-top PSL80F 101) and U-shaped PSL82U 102) derivative

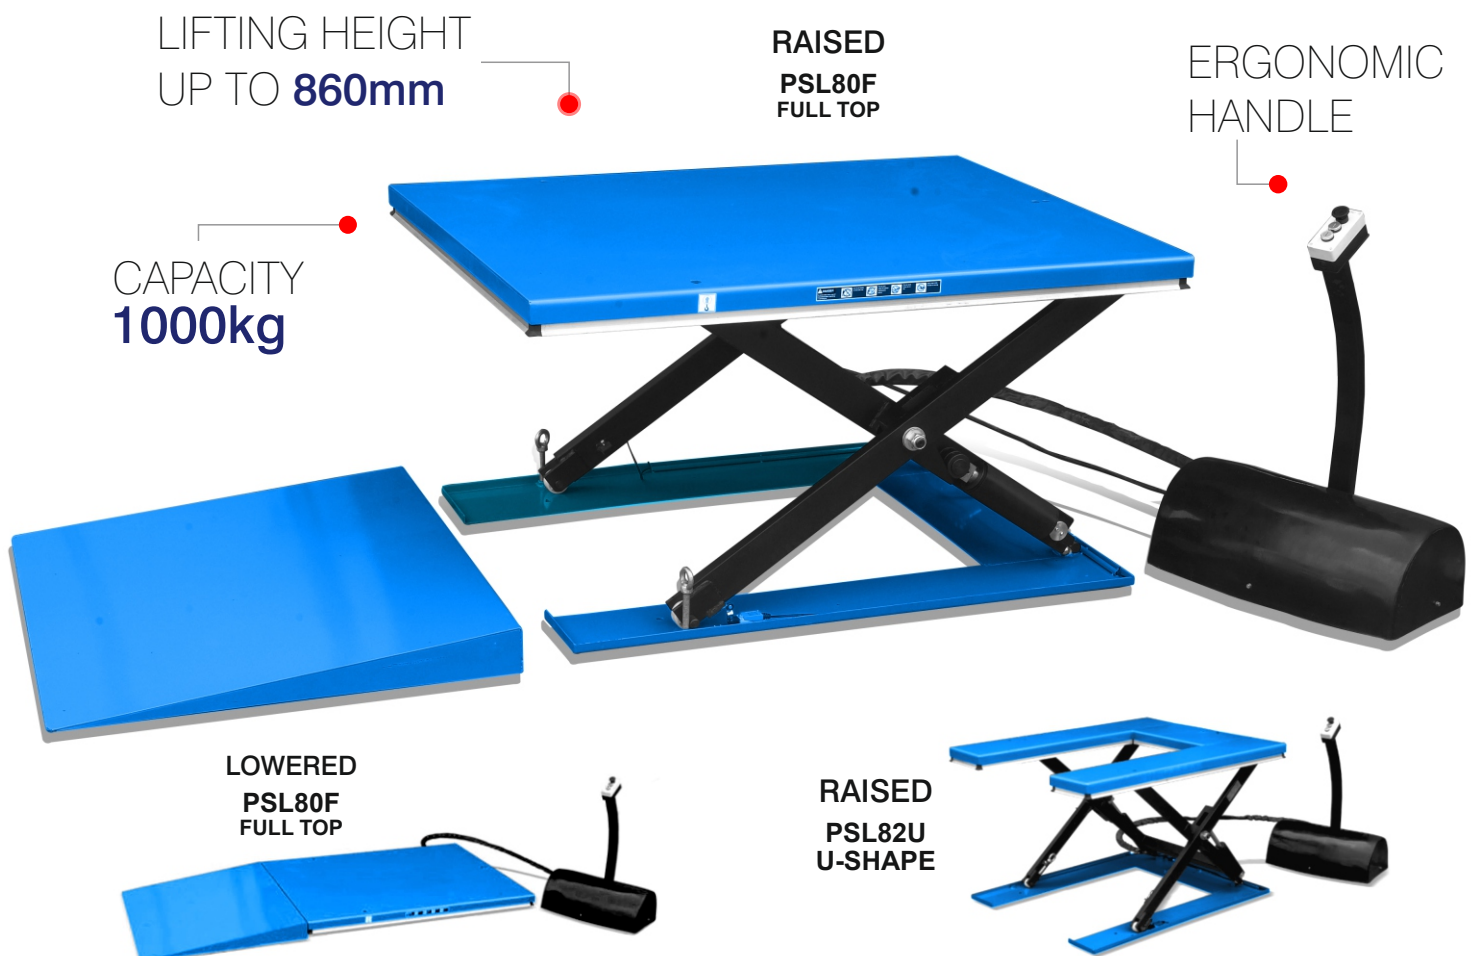


Feature	Model			PSL80F FULL TOP	PSL82U U-SHAPE
	1.1	Capacity	kg	1000	1000
	1.2	Raised Height	mm	860	860
	1.3	Lowered Height	mm	80	82
	1.4	Platform Size (L x W)	mm	1450x1140	1450x1140
	1.5	Platform Cut-Out Size (l x w)	mm	-	1080x580
	1.6	Lifting Time	s	25	25
	1.7	Lifting speed with load	mm/s	34	34
	1.8	Lowering speed with load	mm/s	55	55
	1.9	Motor	kW	0.75	0.75
	1.10	Net Weight	kg	235	250

PSL80F
FULL TOP

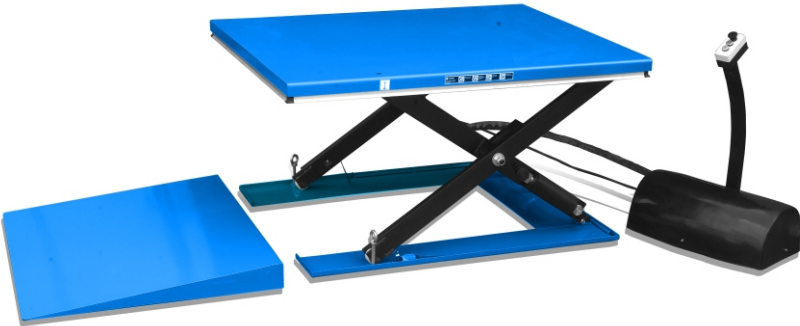

PSL82U
U-SHAPE



- A: 280 (mm)
- B: 1080 (mm)
- C: 580 (mm)
- L: 1450 (mm)
- W: 1140 (mm)

LOWERED
PSL80F
FULL TOP

