



5. Seat legs

Attach two seat legs to each seat as shown using 2 x 90mm bolt per leg. Secure each bolt using a 8mm washer in 8mm Tnut. Position a leg brace between each set of legs. Secure through the pre- drilled holes in the legs into the ends of the brace using 4 x 5*70mm screws per brace. Secure the brace to the frames using 2 x 4*60mm screws per brace.

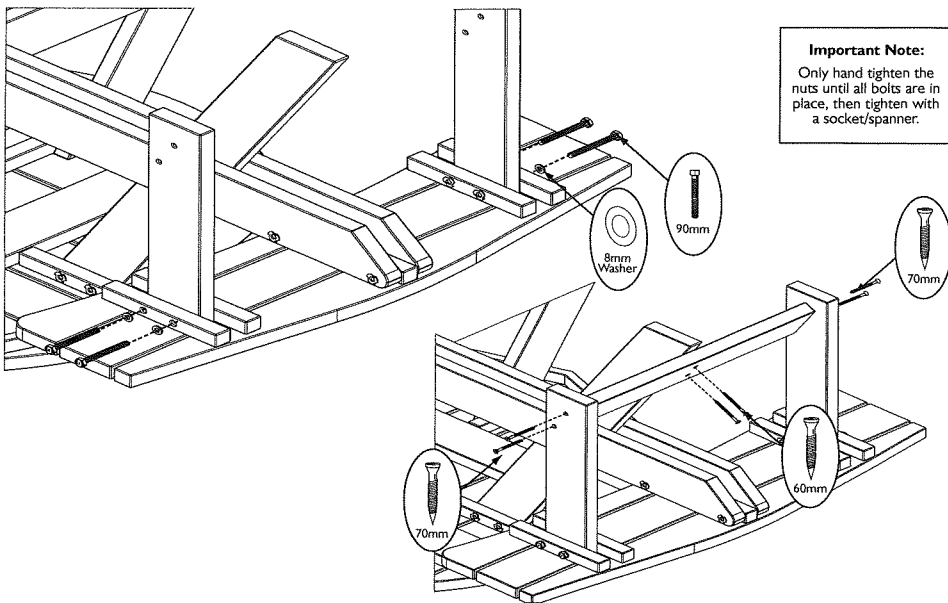

6. Tighten all bolts

To finish the assembly tighten all bolts and turn the table over

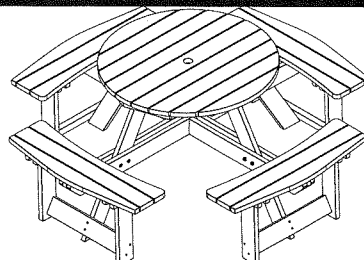

Safety information

IMPORTANT, RETAIN FOR FUTURE REFERENCE: READ CAREFULLY

Periodically check all fastenings for tightness

For contract use


If in doubt of any aspect regarding the assembly, use or safety of your Picnic Bench please contact us :

Round Picnic Bench

Assembly Instructions

Before assembly

- We recommend that time is taken to read the instructions before starting assembly, then follow the easy step by step guide. The instruction sheet is only a guide to the assembly. Certain items may not be shown to scale.
- Check all components prior to assembly
- This product should be assembled by no less than two people
- Drill all components where indicated

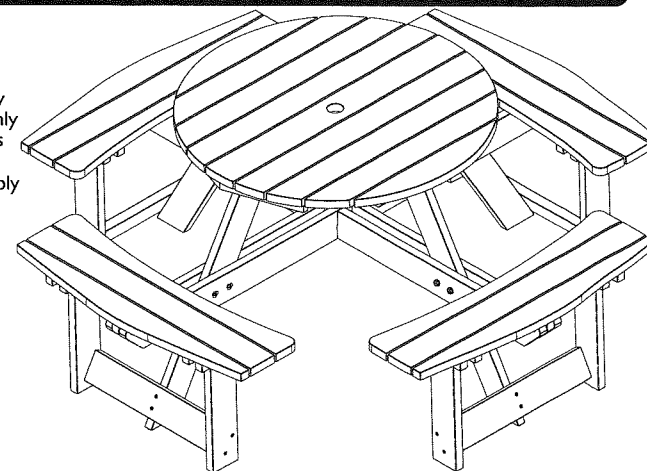


Recommended tools for assembly

- Socket set or spanner
 - 10mm Socket/spanner
 - 13mm Socket/spanner
- Power drill/screwdriver
 - Cross head screwdriver bit


No.	Components	Qty.
1	Table top	1
2	Frame A	2
3	Frame B	2
4	Seat	4
5	Table legs	4
6	Seat legs	8
7	Leg brace	4

No.	Fixing kit	Qty.
	M8 Tnuts <i>already fixed</i>	40
8	120mm (M8) bolt	8
9	90mm (M8) bolt	16
10	80mm (M8) bolt	8
11	110mm (M8) bolt	8
12	8mm washer	40
13	70mm (M5) screws	16
14	60mm (M4) screws	8

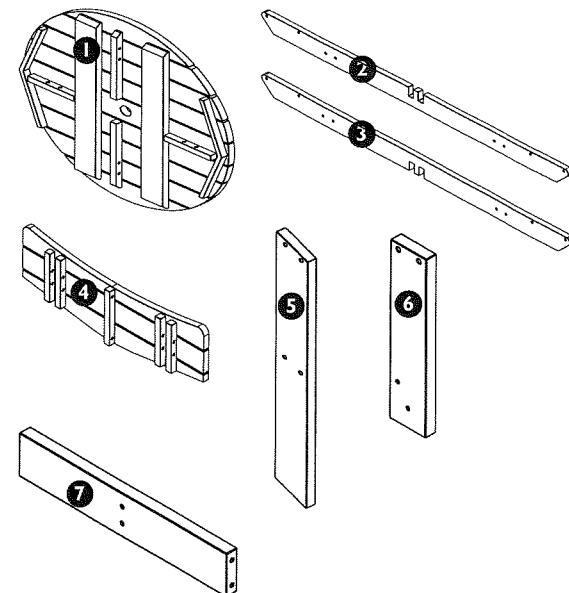

1. Frame assembly

Position the frames as shown.

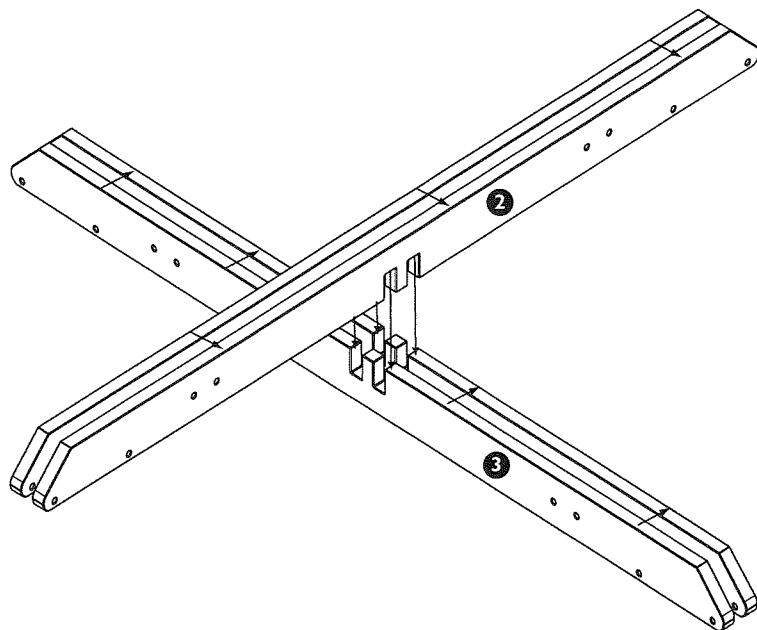


2. Table top legs

Lay the table top upside down on a soft surface to avoid scratching the top. Place the legs and position centrally onto the table top. Secure the table supports to the table using 2 x M8 80mm bolts per leg. Secure each bolt with an 8mm washer in and 8mm Tnut.

Important Note:

Only hand tighten the nuts until all bolts are in place, then tighten with a socket/spanner.

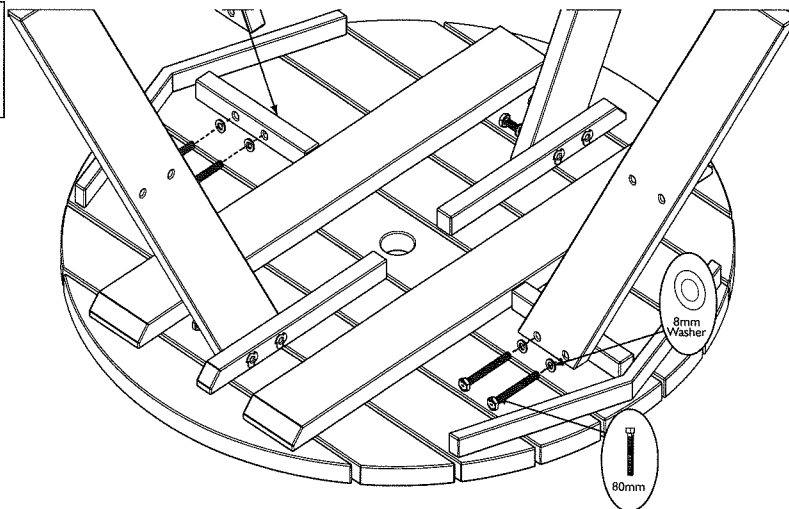


3. Table top supports

Slide the frame into each of the legs. Align the holes on the frames with the holes in the legs and secure using 2 x 110mm bolts per support. Push a bolt through each hole, and secure with an 8mm washer and an 8mm Tnut. Only hand tighten the nuts at this stage.

Important Note:

Only hand tighten the nuts until all bolts are in place, then tighten with a socket/spanner.

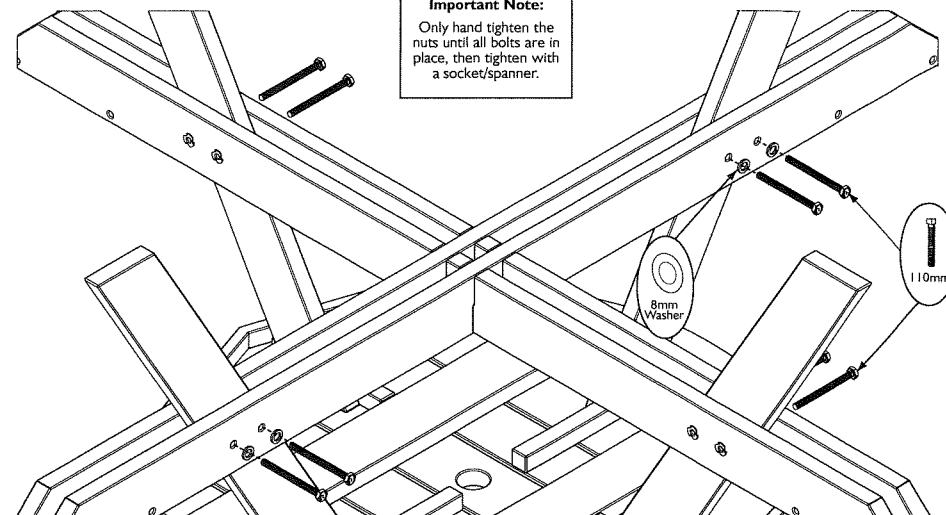

4. Seats

With the assembly still upside down, attach the four seats. Insert the middle seat bearer between the frames as shown. Align the holes and secure using 2 x 120mm bolts per seat, secure each bolt with an 8mm washer and 8mm Tnut.

Important Note:

Only hand tighten the nuts until all bolts are in place, then tighten with a socket/spanner.

