




Note:
Product may only
be used when secured
with suspension hooks.

8058 Stairs without platform, step angle 68°

- › Leaning stairs with handrail on both sides.
- › Ladder width 500 mm.
- › Step depth 80 mm and step distance 230 mm.
- › Suspension hooks \varnothing 30 mm.



Recommended accessory:



P. 193

Suspension set


- › Order no. 0054835

10
YEAR
GUARANTEE

★ ★ ★
MADE IN
GERMANY

Number of steps	5	6	7	8	9	10	11	12	13	14	15
Ladder length (approx. m)	1.27	1.52	1.77	2.02	2.27	2.52	2.77	3.02	3.27	3.52	3.77
Standing height (approx. m)	1.14	1.37	1.61	1.84	2.07	2.30	2.53	2.76	3.00	3.23	3.50
Reach height (approx. m)	3.14	3.37	3.61	3.84	4.07	4.30	4.53	4.76	5.00	5.23	5.50
Overhang (approx. m)	0.55	0.64	0.74	0.83	0.92	1.02	1.11	1.21	1.30	1.39	1.49
Weight (approx. kg)	7.5	8.5	9.5	10.5	11.5	12.5	13.5	14.5	15.5	16.5	17.5
Order no.	805805	805806	805807	805808	805809	805810	805811	805812	805813	805814	805815

For an explanation of standing/reach height see on page 5.

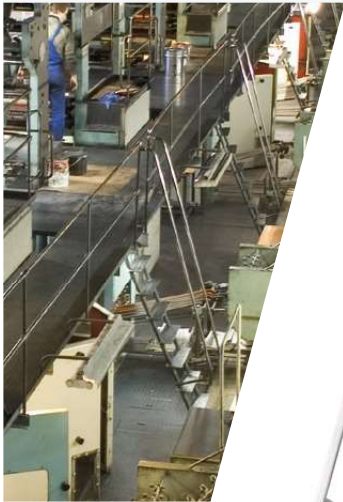


Note:
This ladder is not a leaning
ladder as stipulated
by EN 131-1 and may
not be leaned on freely.
It may be used only when
hooked in place.

8060 Stairs with platform, step angle 68°

- › Leaning stairs with handrail on both sides and guardrail.
- › Ladder width 500 mm.
- › Step depth 80 mm and step distance 230 mm.
- › Platform depth 450 mm.
- › Suspension hooks \varnothing 35 mm.



Recommended accessory:



P. 193

Suspension set

- › Order no. 0054835

10
YEAR
GUARANTEE

★ ★ ★
MADE IN
GERMANY

Number of steps incl. platform	5	6	7	8	9	10	11	12	13	14	15
Ladder length (approx. m)	1.20	1.45	1.70	1.95	2.20	2.45	2.70	2.95	3.20	3.45	3.70
Standing height (approx. m)	1.15	1.38	1.61	1.85	2.08	2.31	2.54	2.77	3.00	3.24	3.47
Reach height (approx. m)	3.15	3.38	3.61	3.85	4.08	4.31	4.54	4.77	5.00	5.24	5.47
Overhang (approx. m)	0.92	1.01	1.11	1.20	1.29	1.39	1.48	1.57	1.67	1.76	1.86
Weight (approx. kg)	12.0	13.3	14.5	15.8	17.0	18.3	19.5	20.8	22.0	23.3	24.5
Order no.	806005	806006	806007	806008	806009	806010	806011	806012	806013	806014	806015

For an explanation of standing/reach height see on page 5.