




# Hooped Perimeter Barrier 90mm Diameter Galvanised, Concrete In

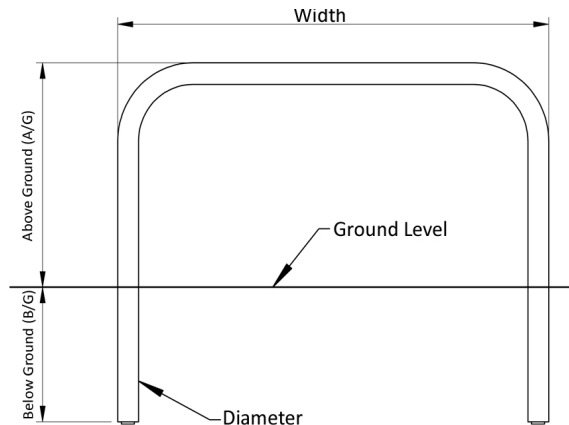


Perimeter Barriers are designed to help secure site perimeters and provide a permanent obstacle to vehicle access, to mark boundaries, define trolley parks and protect vulnerable door entrances and exits.

Suited to sites where aesthetics and security are equally important, perimeter barriers are commonly found outside car showrooms acting as protection for the cars on the forecourt without impeding a customer's view of the vehicles.

Available in a variety of heights and widths, available as concrete in, bolt down or removable for occasional access.

Available as galvanised as standard. Stainless steel, galvanised and colour coated available extra.

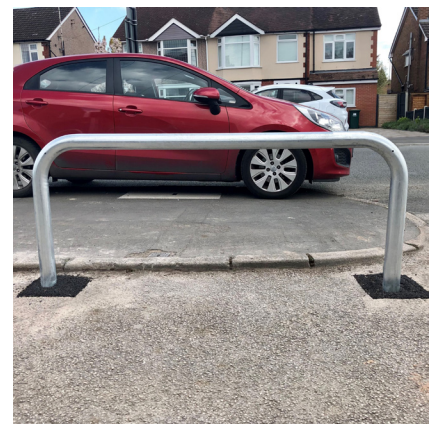

Part Number	Description, Height above ground x overall width	Weight (kg)
138 178 950	500 x 750 Galvanised - Concrete In	12kg
138 178 951	500 x 1000 Galvanised - Concrete In	14kg
138 178 956	500 x 1500 Galvanised - Concrete In	17kg
138 178 962	500 x 2000 Galvanised - Concrete In	20kg
138 178 966	750 x 1000 Galvanised - Concrete In	17kg
138 178 972	750 x 1500 Galvanised - Concrete In	20kg
138 178 978	750 x 2000 Galvanised - Concrete In	24kg
138 178 981	1000 x 1000 Galvanised - Concrete In	20kg
138 178 987	1000 x 1500 Galvanised - Concrete In	24kg
138 178 993	1000 x 2000 Galvanised - Concrete In	27kg

## Product details

- 3mm wall thickness
- Concrete in 300mm (below ground)
- Colour coated options available extra

## Installation & use

Bolt down to a suitable concrete surface.  
Telescopic, removable and concrete in are supplied with welded fixing spikes to ensure firm ground anchorage into concrete.  
Telescopic, removable and concrete in require a suitable excavated hole for installing into concrete.  
Products are guaranteed for 12 months (if installed and used correctly).



[www.autopa.co.uk](http://www.autopa.co.uk)  
+44 (0)1788 550556

AUTOPA Limited  
Cottage Leap, Rugby, Warwickshire CV21 3XP

