


## Square Removable Bollard 900 Above Ground 50mm - 150mm Diameter Galvanised & Black/White





The AUTOPA Square Removable Post is ideal for securing areas only occasional access is needed. The post is locked into the ground socket using a padlock (available separately) and can be removed as required to allow access. Additional ground sockets are available to safely store the post when it is not in use.

The Square Removable Post is available in sizes; 750mm, 900mm and 1000mm above ground. Manufactured from galvanised mild steel as standard and can be colour coated as required (BS/RAL codes must be specified at time of order). Also available in Black with a White reflective band.

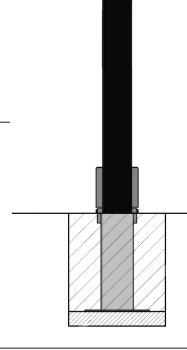

| Part Number   | <u>Description</u>                                     | Lift Weight (kg) | Weight (kg) |
|---------------|--|------------------|-------------|
| 138 100 699   | 50mm x 50mm Galvanised and Black & White - Removable   | 5kg              | 9kg         |
| 138 100 694   | 60mm x 60mm Galvanised and Black & White - Removable   | 6kg              | 10kg        |
| 138 100 687   | 70mm x 70mm Galvanised and Black & White - Removable   | 8kg              | 12kg        |
| 138 100 677   | 80mm x 80mm Galvanised and Black & White - Removable   | 9kg              | 13kg        |
| 138 100 662   | 90mm x 90mm Galvanised and Black & White - Removable   | 10kg             | 14kg        |
| 138 100 656BW | 100mm x 100mm Galvanised and Black & White - Removable | 11kg             | 19kg        |
| 138 100 648BW | 120mm x 120mm Galvanised and Black & White - Removable | 22kg             | 30kg        |
| 138 100 646BW | 150mm x 150mm Galvanised and Black & White - Removable | 27kg             | 35kg        |

## **Product details**

- Socket 220mm (below ground) 50mm 90mm diameter
- 50mm 100mm 3mm wall thickness
- 120mm and 150mm diameters complete with handles
- Socket 300mm (below ground) 100mm 150mm diameter
- 120mm and 150mm 5mm wall thickness
- · Price excludes padlock to secure

## Installation & use

Bolt down to a suitable concrete surface.

Telescopic, removable and concrete in are supplied with welded fixing spikes to ensure firm ground anchorage into concrete.

Telescopic, removable and concrete in require a suitable excavated hole for installing into concrete.

Products are guaranteed for 12 months (if installed and used correctly).



www.autopa.co.uk +44 (0)1788 550556



ISO 9001 Quality Management Systems CERTIFIED



